



**ED RAICHERT INC
INDUSTRIAL SEWING EQUIPMENT
PRESSER FEET FOR INDUSTRIAL SINGLE
SEWING MACHINES.**

**JUKI DDL227,555,5550,8300,8500,8700
CONSEW,BROTHER,MITSUBISHI,COLUMBIA,
SINGER 31-15,95,96,241,251,281,491,591,20u**

**COMMON PRESSER FEET FITS
MOST DROP FEED SINGLE
NEEDLE INDUSTRIAL SEWING
MACHINES**

ED RAICHERT INC 3517 N 42ND AVE PHX, AZ 85019
PH 602-272-2301 FAX 602-272-0509 EMAIL SALES@RAICHERT.COM
WWW.RAICHERT.COM

HINGED FEET



142058N
Narrow
142058NT Teflon Base



24983 (24545) (62927) (505643) (540739)
Regular (Long Toe $\frac{1}{4}$ " Long)
ALSO AVAILABLE
24983NS No Slot
24983S (Soft)
24983T (24545T) (62927T) (505643T) (540739T) Teflon Base



24983SW (24545SW)
Swiss Made Regular (Long Toe $\frac{1}{4}$ " Long)
24983USA U.S.A. Made
ALSO AVAILABLE
24982 Shank Only
26231 Hinged Foot Spring



161066
Regular (Short Toe $\frac{1}{4}$ " Long)



24983T
Teflon Coated Base

HINGED FEET



410916
Narrow (With Heel) $\frac{1}{4}$ " wide
ALSO AVAILABLE
543419 $\frac{1}{4}$ " wide



19336
Wide
19336T Teflon Base
19335 Shank Only




127233 (127234)
Extra Wide
127233T (127234T) Teflon Base



12144H
Double Toe Even
12144HS (Soft)
12144HT Teflon Base

To Be Assured Of The Highest Quality Specify Precision Made



52427
Hinged, $\frac{1}{2}$ " Wide, Heavy, Left Toe $\frac{1}{4}$ " Wide, Right Toe $\frac{1}{4}$ " Wide



143168
Presser Foot (For Curtain Work)

HINGED ZIPPER FEET



40322SH
Split Hinge
Teflon Base
40322SHT



165010H
Lin-O-Vel Split Hinge With Turned-Up Front
165010HT Teflon Base
165010HNF For Needle Feed



121946
Medium Split Hinge
121946T Teflon Base



142058 (142059)
Wide Split Hinge
142058T (142059T) Teflon Base

SOLID ZIPPER FEET



Split
165010
165010T Teflon Base



Hole in Center
40322
40322T Teflon Base



Closed Split
40322CS
40322CST Teflon Base

ZIPPER FOOT



MT3
For Single Needle Drop Feed Lockstitch
ALSO AVAILABLE
UMT3 For Union Special Single Needle Lockstitch (61200; 61300; 61400; 63400 Cl. Machines)
MT4 Replacement Bottom (For MT3 and UMT3)

New Items Are Always Being Added To Our Line. If The Item Required Is Not Listed In The Index, Call Our Customer Service/Parts Department.




SINGLE FOLD HEMMER FEET

Downturn	Upturn	Reverse Downturn
490355-3/16	490357-3/16	490356-3/16
490355-1/4	490357-1/4	490356-1/4
490355-3/16 USA	490357-3/16 USA	490356-3/16 USA
490355-1/4 USA (H5019)	490357-1/4 (H5017) USA	490356-1/4 USA (H5019R)
	Specify When Ordering	

HEMMER FEET (DOUBLE FOLD) UPTURN



BALL	WIRE	SPRING
490358-1/32	490360-1/32	490359-1/32
490358-1/16	490360-1/16	490359-1/16
490358-1/8	490360-3/32	490359-1/8
490358-3/16	490360-1/8	490359-3/16
490358-1/4 (H6010)	490360-3/16	490359-1/4 (H5018)
	490360-1/4	



For Straight Edge On Light Materials



For Straight Edge; Spring Allows Even Cross Seams To Pass Through Freely.

SCROLL HEMMER FEET (DBL. FOLD, CLEAN FINISH)



- 160344-1/16
- 120938-3/32
- 120803-1/8
- 120804-5/32
- 120805-3/16
- 120940-7/32
- 120806-1/4
- 120807-5/16



Specify Size When Ordering

SINGLE FOLD UPTURN FELLER FOOT



- P25-1/8
- P4-3/16
- P6-1/4
- P75-5/16
- P9-3/8



Artwood Cloth Pullers

HINGED TUBE FEET



S10L-3/16 Left	S10C-1/8 Center	S10R-3/16 Right
S10L-1/4 Left	S10C-3/16 Center	S10R-1/4 Right
S10L-3/8 Left	S10C-1/4 Center	S10R-3/8 Right
S10L-1/2 Left	S10C-3/8 Center	S10R-1/2 Right
S10L-5/8 Left	S10C-1/2 Center	S10R-5/8 Right
S10L-3/4 Left	S10C-5/8 Center	S10R-3/4 Right
S10L-1 Left	S10C-3/4 Center	S10R-1 Right
	S10C-1 Center	

TUBES AVAILABLE SEPARATELY

TU-1/8 Tube Size 1/8"	TU-1/2 Tube Size 1/2"
TU-3/16 Tube Size 3/16"	TU-5/8 Tube Size 5/8"
TU-1/4 Tube Size 1/4"	TU-3/4 Tube Size 3/4"
TU-3/8 Tube Size 3/8"	TU-1 Tube Size 1"

WHEN ORDERING . . . PLEASE USE THE PART NUMBERS EXACTLY AS SHOWN IN THIS CATALOG.

TOP STITCH JOINER FEET




- H5020-3/16
- H5020-1/4

Single Downturn Fold On Top Ply And Is Top Stitched And Joined To Bottom Ply In One Operation. Specify Size When Ordering



DELUXE ADJUSTABLE TAPE FOOT



S534

Designed for accuracy and uniformity. Has an adjustable guide for running ribbons, bindings, etc. Adjustable to any width up to 1 1/4". Stitch can be regulated to any position on binding.

ALSO AVAILABLE

S534-O/S Adjustable Tape Foot (Old Style; adj. to 1 1/4")

1/2" SEAM BINDING FOOT WITH GUIDE



S532

ADJUSTABLE TUBE FOOT



S533

Complete With 2 Tubes. Adjustable In Width (3/4" to 1" And 1" to 2")

ALSO AVAILABLE

S5331 (3/4" to 1") Tube
S5332 (1" to 2") Tube

HEMMING FEET AVAILABLE IN 3 SIZE WIDTHS

The Turned Up Toe Permits Hemmers And Folders To Run Through Freely Without Pleating Or Winking.



S542-1/2



S542-3/4



S542-1

HINGED HEMMING FOOT USED WITH HEMMERS UP TO 1/4"



S545

An Excellent Foot. Used In Conjunction With Hemmers And Other Attachments. Helps Keep The Fold Of The Material In Place.

To Be Assured Of The Highest Quality Specify Precision Made



REVERSE EDGE GUIDE HEMMING FOOT



SR1

For Use On Hems When A More Uniform Stitching Margin Is Required

EDGE GUIDE HEMMING FEET FOR USE ON HEMS WHEN A MORE UNIFORM STITCHING MARGIN IS REQUIRED



S538

Small For Hems Up To 1/4"



S539

Medium For Hems Up To 1/2"



S540

Large For Hems Up To 1"



S541

Extra Large For Hems 1" And Over

DOUBLE EDGE GUIDE HEMMING FEET



S539D-1/2
S540D-5/8

Size Represents The Distance Between The Needle Hole And Right Guide.

ADJUSTABLE HINGED RAISING FOOT



S582

(Makes Any Size Edge From 1/4" To 1/2")



RIGHT HINGED RAISING FEET

- | | | |
|-------------|-------------|-------------|
| 12463H-1/32 | 12463H-1/8 | 12463H-5/16 |
| 12463H-1/16 | 12463H-3/16 | 12463H-3/8 |
| 12463H-3/32 | 12463H-1/4 | 12463H-1/2 |

Right Hinged Raising Feet With Teflon Base

- | | | |
|--------------|--------------|--------------|
| 12463HT-1/32 | 12463HT-1/8 | 12463HT-5/16 |
| 12463HT-1/16 | 12463HT-3/16 | 12463HT-3/8 |
| 12463HT-3/32 | 12463HT-1/4 | 12463HT-1/2 |

Specify Size When Ordering



LEFT HINGED RAISING FEET

- | | | |
|--------------|--------------|--------------|
| L12463H-1/32 | L12463H-1/8 | L12463H-5/16 |
| L12463H-1/16 | L12463H-3/16 | L12463H-3/8 |
| L12463H-3/32 | L12463H-1/4 | L12463H-1/2 |
| | | L12463H-5/8 |

Left Hinged Raising Feet With Teflon Base

- | | | |
|---------------|---------------|---------------|
| L12463HT-1/32 | L12463HT-1/8 | L12463HT-5/16 |
| L12463HT-1/16 | L12463HT-3/16 | L12463HT-3/8 |
| L12463HT-3/32 | L12463HT-1/4 | L12463HT-1/2 |

Specify Size When Ordering

New Items Are Always Being Added To Our Line. If The Item Required Is Not Listed In The Index, Call Our Customer Service/Parts Department.

SOLID RAISING FEET



12463-1/32
12463-1/16
12463-3/32
12463-1/8
12463-3/16



12463-1/4
12463-5/16
12463-3/8
12463-1/2

Specify Size When Ordering

Solid Feet



12142
(Hard)
12142S (Soft)



12144
Double Toe Even (Hard)
12144S (Soft)
12144SH (Soft-Heavy)



12144TU
Double Toe Even-Turned-Up



12144SP
With One Toe Turned Up



25983
Half Foot



12143
Single Toe

If You Do Not Find A Part Shown Under A Machine Class, PLEASE Refer To The Numerical Parts Listing. It May Be Shown In Another Section.

COMPENSATING FEET

WITH DOUBLE SPRING ACTION AND REPLACEABLE SCREWS, SPECIFY SIZE AND POSITION WHEN ORDERING



21R (143219) 1/8" Right
22L (143215) 1/8" Left
23D (23) 1/8" Double

With Teflon Base:

21RT Right
22LT Left
23DT Double



212 1/4" Right
222 1/4" Left

With Teflon Base:

212RT Right
222LT Left



210 1/8" Right Narrow
220 1/8" Left Narrow
230 1/8" Double Narrow

With Teflon Base:

210RT Right Narrow
220LT Left Narrow
230DT Double Narrow



213 1/4" Right
223 1/4" Left

With Teflon Base:

213RT Right
223LT Left



211 1/8" Right
221 1/8" Left
231 1/8" Double

With Teflon Base:

211RT Right
221LT Left
231DT Double



224 1/4" Left
214 1/4" Right

With Teflon Base:

214RT Right
224LT Left

ALSO AVAILABLE

CFS1 Replacement Screw
(1/8" Thru 1/4" Gauge)
CFS2 Replacement Screw
(1/4" Gauge)
CFS3 Replacement Screw
(1/4" Gauge)

CFS4 Replacement Screw (1/4" Gauge)
CFS5 Replacement Screw For 210
CSP1 Replacement Spring For 210,
220

When Ordering . . .
PLEASE Use The Part Numbers EXACTLY As Shown In This Catalog. This Will Help Us To Expedite Your Shipments And The Invoicing Of Your Orders!!

COMPENSATING FEET WITH NEEDLE HOLE IMPROVES OPERATOR'S CONTROL WHEN STITCHING AT HIGH SPEEDS



211H Illustrated

- 21H (21HR) 1/8" Right
- 22H (22HL) 1/8" Left
- 211H 1/8" Right
- 221H 1/8" Left
- 212H 1/4" Right
- 222H 1/4" Left



Special Foot Designed For Understitching

- R22-1 1/8" Left

ALSO AVAILABLE

- 190 Foot Holding Screw
- 286 Foot Holding Screw (Thumb Screw Type)

LARGE SIZE COMPENSATING FEET



215R 1/4" Right
215RT 1/4" Right Teflon



216R 1/4" Right
216RT 1/4" Right Teflon



218R 1/4" Right
218RT 1/4" Right Teflon

225L 1/4" Left
225LT 1/4" Left Teflon

226L 1/4" Left
226LT 1/4" Left Teflon

228L 1/4" Left
228LT 1/4" Left Teflon

CFS7 Replacement Screw

CFS6 Replacement Screw

CFS8 Replacement Screw

COMPENSATING HEMMING FEET

Compensates For Variation Of Material. For Faster Feeding, Perfect Hemming And Folding, Garment Is Flatter — Less Puckering And Curling.



S543

Narrow Used With Hemmers And Folders Up To 1/4"



S544 (270664)

Wide Used With Hemmers And Folders 1/4" & Higher

TEFLON MOLDED COMPENSATING FEET



Left

- MT22 1/8" Left
- MT223 1/8" Left
- MT221 1/4" Left
- MT222 1/4" Left
- MT224 1/4" Left

ALSO AVAILABLE Bottom Only, Left

- MT22B 1/8" Left
- MT221B 1/4" Left
- MT222B 1/4" Left
- MT223B 1/4" Left
- MT224B 1/4" Left

Right

- MT21R 1/8" Right
- MT211R 1/8" Right
- MT212R 1/4" Right
- MT213R 1/4" Right
- MT214R 1/4" Right

ALSO AVAILABLE Bottom Only, Right

- MT21RB 1/8" Right
- MT211RB 1/8" Right
- MT212RB 1/4" Right
- MT213RB 1/4" Right
- MT214RB 1/4" Right


WHEN ORDERING . . . PLEASE USE THE PART NUMBERS EXACTLY AS SHOWN IN THIS CATALOG.

DUAL COMPENSATING PRESSER FEET (COMPENSATING FEET WITH STRIP GAUGES)

These Feet Enable Operator To Obtain Two Different Stitching Margains Without Changing Presser Foot.

★ Two Operations With The Same Foot ★

Operation "1"



From Center of Hole to Compensating Section

Operation "2"



From Center of Hole to Edge Guide



211-14 Illustrated

- 21-14 (1/8" Right) With 1/4" Right Strip Gauge
- 21-15 (1/8" Right) With 1/4" Right Strip Gauge
- 211-14 (1/4" Right) With 1/4" Right Strip Gauge
- 211-15 (1/4" Right) With 1/4" Right Strip Gauge

EACH FOOT SUPPLIED WITH ALLEN WRENCH. Replacement Parts For Dual Compensating Raising Feet

- CSP4 Small Spring
- CSP5 Large Spring
- CFS10 (21-14SC) Screw (Allen-Small)
- CFS11 Screw (Large)
- 21-14WR Wrench

TOP STITCH FOOT FOR COLLAR SCORING WITH SPECIAL GROOVE



147391

For Use With 52033LG (147157) Plate and 149006 Top Stitch Feeder.

1/32" EDGE STITCH FOOT



SM20

With Adjustable Tension Spring For Different Weight Materials

New Items Are Always Being Added To Our Line. If The Item Required Is Not Listed In The Index, Call Our Customer Service/Parts Department.

**ELASTIC SHIRRING FEET
WITH ADJUSTABLE
TENSION**


S537-1/8 *S537-1/4*
S537-3/16 *S537-3/8*
S537-1/2

ALSO AVAILABLE

S537AS Tension Coil Spring
S537ASS Tension Adjusting Screw
S537TS-1/8 Tension Spring (Flat)
For $\frac{1}{8}$ "
S537TS-1/4 Tension Spring (Flat)
For $\frac{1}{4}$ "
S537TSS Tension Spring (Flat)
Screw

**When Ordering . . .
PLEASE Use The
Part Numbers
EXACTLY As Shown
In This Catalog.
This Will Help Us To
Expedite Your
Orders!!**

**SOLID TOP STITCH GUIDE
FEET WITH SPRING**


36465-1/32
36465-3/16
36465-1/16
36465-1/4
36465-3/32
36465-5/16
36465-1/8
36465-3/8
36465-1/2

**Specify Size When Ordering
Replacement Springs**

36464-1/32 (Sizes $\frac{1}{8}$ ", $\frac{1}{4}$ ", $\frac{1}{2}$ ", $\frac{3}{4}$ ")
36464-3/16 (Sizes $\frac{3}{8}$ ", $\frac{1}{2}$ ", $\frac{3}{4}$ ")
36464-3/8 (Size $\frac{1}{2}$ ")
36464-1/2 (Size $\frac{1}{2}$ ")
665 Spring Holding Screw

**ATTACHMENT MAKERS
BLANK SHIRRING FEET**
Made Of Forged Steel.


S206
Regular



S207
Large

SHIRRING FEET


120828
Wide
Reg. Step



120828H
Wide
High Step



270195
(Enables Operator To Get Finger
Closer To Rear Of Needle Hole.)



120828N
Narrow
Reg. Step

TAPE EDGE SHIRRING FEET


PSN
Narrow, $\frac{1}{4}$ " Slot



PSR
Regular, $\frac{1}{4}$ " Slot




PSW
Wide, $\frac{1}{2}$ " Slot

**ADJUSTABLE SHIRRING
FOOT**


S950
Includes regular and high blocks.
1443-1/8 Block Holding Screw

**COMBINATION SHIRRING
AND STITCHING FOOT**


S952
ALSO AVAILABLE
S952SC Screw
S952SP Spring

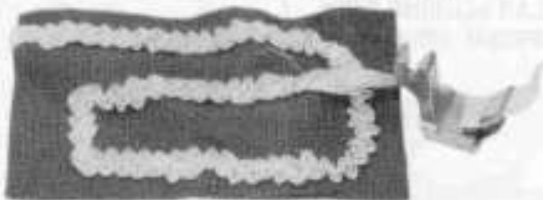SHIRRING ATTACHMENT FOOT


Shirrs Lace, Tricot or Ribbon To Top of Garment
No Other Parts Or Attachments Needed!
SAF-3/8 For Up To $\frac{1}{4}$ " Bias

**When Ordering . . . PLEASE Use
The Part Numbers EXACTLY As
Shown In This Catalog. This Will
Help Us To Expedite Your
Shipments And The Invoicing Of
Your Orders!!**

Compensating Presser Foot For Shirring And Cording

For 400W, 400W30, 31, 45IK31



270533

SOLID CUT-OUT BINDER FEET



Regular

- 12142C
- 12142C-3/4
- 12142C-1-1/8
- 12142C-7/8
- 12142C-1-1/4
- 12142C-1
- 12142C-1-3/8
- 12142C-1-1/2

THREAD CUTTER FEET

Spring Holds Thread
Knife Cuts The Thread



24983TC



19336TC



127233TC

CHAIN CUT OFF FEET



S536



127260

- Parts For Chain Cut-Off Feet**
- S536-1 Knife Screw For S536 Foot
 - S536-2 Large Screw For S536 Foot
 - S536-3 Knife For S536 Foot
 - 127259 Knife For 127260 Foot

HINGED BINDER FOOT



12142HB
With Stop



Extra Wide
Open Needle Hole
12142XW0



Extra Wide
Closed Needle Hole
12142XW

(Feet may not work on all attachments. May require some minor modification.)

COMPENSATING BINDER FEET

Fits Any Set-In-Binder



601 For W" or W" Binding

- 602 For 1" or 1 1/4" Binding
 - 604 For 3/4" or Wider Binding
- This Foot Compensates For Any Variation Of Thickness. Helps Eliminate Puckering and Twisting of Binding.

AUTOMATIC CHAIN CUTTING FEET WITH CARBIDE BLOCK



160997-001

Replacement Parts For Automatic Chain Cutting Feet

- 121998 Foot Shoe Only
 - 160709 Carbide Knife Body
 - 121999 Shoe Presser Spring
 - 121996 Block Pressure Spring
- ALSO AVAILABLE**
- 160929

UNITY CHAIN CUT-OFF FOOT



S535

Sturdily Constructed For Long Lasting Use. Cuts And Holds Thread Every Time.

RAPID • CONSISTENT • DEPENDABLE
Operation Takes Place With Regular Sewing Motion. Thread Passes Through Slot Under Spring. Cuts And Holds At Knife Position.

- Parts For Unity Chain Cut-Off Foot**
- S5351 Spring Holding Screw
 - S5352 Knife
 - S5353 Spring
 - S5354 Knife Holding Screw

If You Do Not Find A Part Shown Under A Machine Class, PLEASE Refer To The Numerical Parts Listing. It May Be Shown In Another Section.

12142AHB
For Drop Feed Machines



12142AHBNF
For Needle Feed Machines
ALSO AVAILABLE

12142AHBN Nut For Above Foot

COMBINATION ZIPPER AND QUILTER FOOT



S526

Additional Wire For Right Side For Extra Wide Seams Included.

RIGHT QUILTER ZIPPER FOOT**S523**

Helps To Make Uniform, Even Stitches On Either Side Of Zipper.

QUILTER FEET**160342**

(Also For Darning)

TURNUED UP HINGED PIPING FEET

Left

L36069H-1/8
L36069H-3/16
L36069H-1/4

Right

R36069H-1/8
R36069H-3/16
R36069H-1/4**SOLID QUILTER FOOT****S522****QS1****SOLID PIPING FEET (GROOVED ON BOTTOMS)**


Left

36069L-1/16
36069L-1/8
36069L-3/16
36069L-1/4
36069L-3/8
36069L-1/2

Right

36069R-1/16
36069R-1/8
36069R-3/16
36069R-1/4
36069R-3/8
36069R-1/2

Double

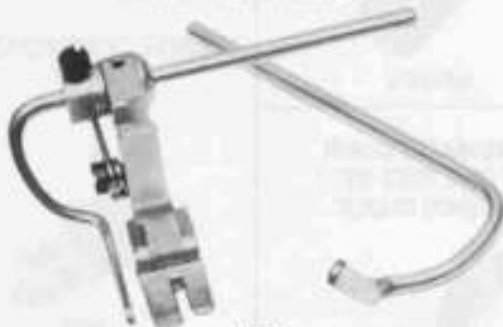36069DG-1/8
36069DG-3/16
36069DG-1/4**HINGED QUILTER FOOT****S521****Parts For Hinged Quilter Foot****S521GL** Left Gauge For Quilter Foot**S521GR** Right Gauge For Quilter Foot**HQ10** Spring Screw For Quilter Foot**HQ15** Quilter Foot Guide Screw**HQ20** Hinged Quilter Foot Spring

*Excellent For All Type Patch Settings (Includes Left And Right Gauges)

SOLID FRENCH PIPING FEET (GROOVED ON BOTTOMS)

Left

26650L-1/16
26650L-1/8

Double

26650DG (1/4" Size)

Right

26650R-1/16
26650R-1/8

Specify Size And Position When Ordering

CORDING AND PIPING FEET (GROOVED ON BOTTOMS)**12435R-1/8**
12435R-3/16
12435R-1/4**31358L-1/8**
31358L-3/16
31358L-1/4

Specify Size When Ordering

This Foot Is A Combination Of A Left Piping Foot And A RIGHT Cording Foot.

This Foot Is A Combination Of A Right Piping Foot And A LEFT Cording Foot.

TURNUED UP PIPING FEET FOR USE ON CORD PIPING ATTACHMENT (GROOVED ON BOTTOMS)**490373-1/8** Solid
490373-3/16 Solid
Specify Size When Ordering**WHEN ORDERING . . . PLEASE USE THE PART NUMBERS EXACTLY AS SHOWN IN THIS CATALOG.**

LEFT SOLID CORDING



Narrow
31358N

31358NT Teflon Base



Wide
31358W

31358WT Teflon Base

RIGHT HINGED CORDING



Narrow
12435HN

12435HNT Teflon Base



Wide
12435HW

12435HWT Teflon Base

ADJUSTABLE LEFT AND RIGHT CORDING



Regular
4351



Hinged
4351H

KISSABLE ZIPPER FOOT



5K223

CONCEALED ZIPPER AND PIPING PRESSER FOOT



5518A

(Adjust To The Zipper Or Piping Width By Moving Groove)

RIGHT SOLID CORDING



Narrow
12435N

12435NT Teflon Base



Wide
12435W

12435WT Teflon Base

LEFT HINGED CORDING



Narrow
31358HN

31358HNT Teflon Base



Wide
31358HW

31358HWT Teflon Base

ADJUSTABLE ROLLER FOOT



5548

Can Be Used For General Kinds Of Tailoring Sewing Machines With No Additional Equipment. By Adjusting Height Of Spring. It Is Adapted For Various Thickness, Kinds, And Layers Of Foam Laminated Fabrics. Both Sides Of Rollers Are Equipped With Needle-bearings Which Assure Smooth Rotation Of Roller And Non-friction To The Fabrics. Both Sides Of Roller Work Individually, Which Enables Sewing In Narrow Curves Very Easily. Since The Rollers Are Placed At 75 Degrees Against The Needle Plate, Straight Sewing Can Be Done Automatically In Free Hands.

Parts For Adjustable Roller Foot

5548-1 Screw

5548-2 Spring

INVISIBLE ZIPPER FOOT

Will Sew All Concealed Or Invisible Polyester Or Nylon Zippers Hinged Solid



5518



5518S

NYLON RING FOOT FOR ITEMS NOT SEWABLE WITH REGULAR OR TEFLON FEET. EXAMPLES: PLASTIC, FOAM POLYETHYLENE, RUBBER BACKED, ETC.



5515

Ring Rotates As Material Passes Under Foot. Action Eliminates Friction.

ALSO AVAILABLE

5516 Nylon Hoop (2 Used) (Sold In Sets)

WHEN ORDERING . . . PLEASE USE THE PART NUMBERS EXACTLY AS SHOWN IN THIS CATALOG.

SLIDE RING TEFLON FOOT WITH POSI-TRACTION NYLON RING

- ★ No Seam Puckering
- ★ Prevents Material Stretching

• Moves together with feed dog and feeds the cloth with accuracy • Specially designed Posi-Traction Ring rotates as material passes under foot • Action eliminates friction • For best results rubberized feeders are recommended • Includes extra set of rings.



SR-DB-L

Single Ring, Left Side For Sewing Zippers, Tapes, etc.

SR-DB-R

Single Ring, Right Side For Sewing Skirts, Slacks, Slide Fasteners, etc.

SR-DB-W

Double Ring For Regular Seaming

ALSO AVAILABLE

SR-DB-H Side Ring (Hoop)

SWIFTY DELUXE ROLLER PRESSER FOOT



SDRF

- Designed For Surfaces That Cannot Be Oiled
- Eliminates The Use Of Oil And Oil Pads
- Stops Gathering And Uneven Stitches
- Excellent For The Belt And Leather Trade

FOR 366K



98797-501

Roller Presser Foot

CROW'S NESTS FOOT



NP-37

Designed For Under-Trim Machines
 ★ Foot Is Designed To Cut The Top Thread Clearly And Hold It In Place For The Next Garment Thus Eliminating Skipped Starting Stitches (When Installing Remove Thread Wiper.)

ALSO AVAILABLE

NP-37B Replaceable Bottom For

Crows Nests Foot

NP-37S Replaceable Screw For

Crows Nests Foot

HINGED LINING FEET



12144HLD

Double Toe Even

12144HLD7 Teflon Base

12144HLB Solid Bottom, Hole in Center

12144HLBT Teflon Base

Nylon Roller Foot

Designed To Stitch Rubber Or Plastic Coated Or Laminated Materials.



S517 For Single Needle Lockstitch Machines

S519 For 111W Needle Feed Machines

SPK ROLLER FOOT



SPK3

Recommended With Use Of SPK1 Needle Plate And SPK2 Feeder

ROLLER PRESSER FEET COMPLETE FOR LAMINATED FABRICS, FOAM RUBBER, NYLON, PLASTICS AND LEATHER



12267 (16100)

With Large 1898 Roller



12264

With Small 1895 Roller

(With Serrated Rollers)

Parts For Roller Presser Foot

1895 Small Roller, 1/8" Dia.

1898 Large Roller, 1/4" Dia.

2205 Spring For Roller Foot

Recommended With Use Of (12438) Single Row Needle Plate and 149436 (12436) Feeder

HINGED NYLON FOOT



S710

Double Toe Cut 1/8" Deep With Bridge in Front of Needle Hole. Prevents Fabrics From Riding Up Into Needle.

S710T Teflon Coated

Specially Designed Center Guide Foot



S510

For Sewing Multiple Rows of Ready Made Rhinestone Trimmings, Braid Trimmings, etc.

FOR 31-17, 18, 29



S194

Foot Bar complete With Roller Foot (19464 With 62861)

ALSO AVAILABLE

19464 Foot Bar Complete With Arm Bracket

62861 Roller Foot With Arm (1/8" Diam., 1/8" Fine)

1528 Roller, Screw Nut

62855 Roller Arm

350104 Roller Screw

WHEN ORDERING . . . PLEASE USE THE PART NUMBERS EXACTLY AS SHOWN IN THIS CATALOG.

HINGED EDGE CUTTER FEET



Regular
 127034H-1/8 (147253-1/8) (522683-008)
 127034H-3/16 (147254-3/16)
 (522680-012)
 127034H-1/4 (147254-1/4) (522680-016)

Blank
 127034HB-1/8
 127034HB-3/16
 127034HB-1/4

With Teflon Base
 127034HT-1/8 (147253T-1/8)
 127034HT-3/16 (147254T-3/16)
 127034HT-1/4 (147254T-1/4) Teflon Base
 Specify Size When Ordering

HINGED FOOT FOR SETTING COLLAR BANDS TO SHIRTS (FOR NEEDLE FEED MACHINES 3/8" WIDE)



149027

FOOT FOR COLLARS AND BACK BINDING



147308

ETCHING (DARNING) FOOT



26936



S546

Hinged Oil Cup Foot For Preventing Plastics, Coated Materials, Leathers, Etc. From Sticking To Foot. Allows For Smooth Sewing On Difficult Fabrics.

SPRING ACTION ROLLER FOOT



R2

Large Wheel Roller And Specialty Designed Spring Allows For Better Feeding Action

ALSO AVAILABLE

R2-1 Replacement Spring

"SNAP-IN" PRESSER FEET
 Enables Operator To Line Up And Match Stripes And Plaids Uniformly. Excellent For Alignment Of Seams, Applique Work, Etc.



SN24983

Regular Size Snap-In Foot Complete
 SNB24983 Snap-In Bottom



SN19336

Wide Size Snap-In Foot Complete
 SNB19336 Snap-In Bottom



SN127233

Extra-Wide Size Snap-In Foot Complete
 SNB127233 Snap-In Bottom

VELVET FEET



S530S

Short Toe



S531L

Long Toe Upturn

ADJUSTABLE GUIDE FOOT



S524

ALSO AVAILABLE

S520R Right Guide


S520L Left Guide

PATENT FOOT WITH 3 GAUGES



35137

9 GAUGE PATENT FOOT

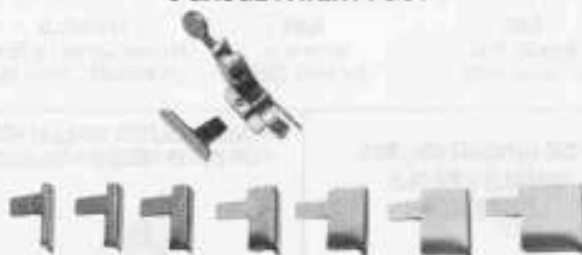

9G

Nine Separate Removable Guides From 1/8" to 1". Convenient "Rear Angle Screw" Insures Positive Slip Proof Locking. "Flat Front" Construction On All Gauges Keeps Cloth Flat While In Operation. Comes In One Complete Unit.

ALSO AVAILABLE

Extra Gauges (Guides) For 9 Gauge Patent Foot

9G-1/16

9G-1/8

9G-3/16

9G-1/4

9G-3/8

9G-1/2

9G-5/8

9G-3/4

9G-1

Specify When Ordering



SOLID BLANK FEET



S801
Wide Hole
In Center (Soft-Heavy)



S802
Wide Hole
To Left (Soft-Heavy)



S803
Extra Wide,
Hole To Right (Soft-Extra Heavy)



S804
Extra Wide,
Hole In Center (Soft-Extra Heavy)



S400
Regular Hole
In Center (Soft)

S401
Regular Hole
To Left (Soft)



S402
Regular Turned
Up Front



S402L
High Turned
Up Front
Note: Foot is Bent In Back Of
Needle Hole



S405
Short
Blank Foot

HINGED BLANK FEET



S500
Regular Hole
In Center (Soft)



S501
Wide Hole
In Center (Soft)



12144HLB
Regular Turned Up Front
12144HLBT Teflon Base

HINGED MOLDED TEFLON FEET FOR NEEDLE FEED MACHINES



MT5 For Singer 111W
UMT5 For Union Special (61900 and
63900 CL Machines)
MT6 Replacement Bottom (For MT5
And UMT5)

SOLID MOLDED TEFLON HINGED FEET FOR DROP FEED MACHINES



MT9 For Singer Lockstitch
UMT9 For Union Special Single
Needle Lockstitch (61200; 61300;
61400; 63400) (CL Machines)
MT10 Replacement Bottom
(For MT9 & UMT9)

FOR SINGER 191; 591
SINGLE NEEDLE
LOCKSTITCH

S41585-002

HINGED MOLDED TEFLON FEET
FOR DROP FEED MACHINES

MT1
For Singer Type Lockstitch
ALSO AVAILABLE
UMT1 For Union Special Needle
Lockstitch (61200; 61300; 61400;
63400; CL Machines)
MT2 Replacement Bottom (For MT1
and UMT1)
MTS1 Replacement Screw

**When Ordering . . . PLEASE Use
The Part Numbers EXACTLY As
Shown In This Catalog. This Will
Help Us To Expedite Your
Shipments And The Invoicing Of
Your Orders!!**